

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/013417 A1

(51) International Patent Classification⁷: E02F 3/96

(21) International Application Number:
PCT/NZ2003/000173

(22) International Filing Date: 6 August 2003 (06.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
520567 6 August 2002 (06.08.2002) NZ

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GR, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: WARD, Simon, Robert [NZ/NZ]; 3/17 Wootton Road, Remuera, Auckland 1005 (NZ).

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(74) Agents: WILSON, Kathryn, S. et al.; Level 9, James & Wells Tower, 56 Cawley Street, Private Bag, 11907 Auckland (NZ).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

(54) Title: CUTTING OR CRUSHING IMPLEMENT

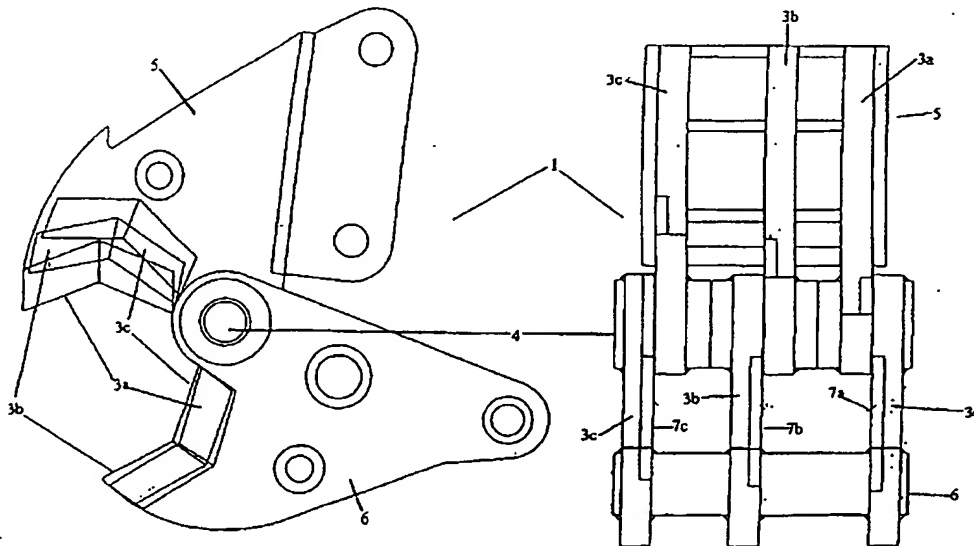

(57) **Abstract:** A cutting or crushing implement (1) as disclosed which includes a plurality of sets of jaws (3) which when operated are adapted to cut and/or crush a single length of material at a plurality of separate positions along the length of the material wherein a single actuation of the implement (1) causes each of the jaws (3) to at least partially and consecutively close. The consecutive closing of adjacent jaws (3) places a first jaw in a cutting or crushing configuration and a second, immediately adjacent jaw in a clamping configuration. The cutting or crushing implement (1) disclosed is configured to connect to and be actuated by the actuator arm of an excavator (9).

WO 2004/013417 A1